


# MonoX™ Black

LG265S1K-A3 / LG260S1K-A3 / LG255S1K-A3

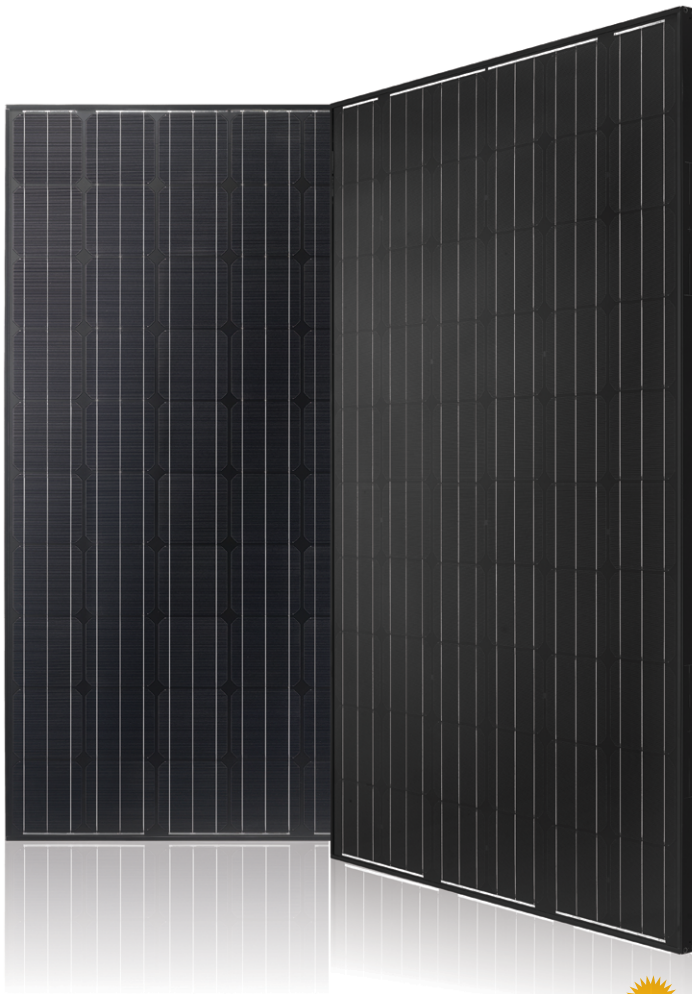

LG Electronics, Inc. (Korea Exchange: 06657.KS) is one of the globally leading companies and technology innovator for electronics, information and communication products. The LG Electronics currently employs more than 91,000 people worldwide in 117 companies. In fiscal year 2011, 48.97 billion USD of revenue was achieved.

LG is one of the world's largest manufacturers of mobile phones, flat screen TVs, air conditioners, washing machines and refrigerators. As a future-oriented company, LG enables others to use technology consisting of renewable energies. LG's high quality solar products are being manufactured in LG's leading production facility in South Korea.



KM 564573 BS EN 61215  
Photovoltaic Modules



Light Weight

## Light and Robust

With a weight of just 16.8 kg, LG modules are proven to demonstrate outstanding durability against external pressure up to 5400 Pa.



Convenient Installation

## Convenient Installation

LG modules are carefully designed to benefit installers by allowing quick and easy installations throughout the carrying, grounding, and connecting stages of modules.



EL Test

## 100% EL Test Completed

All LG modules pass Electroluminescence inspection. This EL inspection detects cracks and other imperfections unseen by the naked eye.



## The LG Mark of Excellence

Customers can rest assured of cutting-edge technology and dependability when they see the LG logo on every cell. The LG logo reflects the high standards that have guided LG for more than 50 years.



Linear Warranty

## Reliable Warranties

LG stands by its products with the strength of a global corporation and sterling warranty policies. LG offers a 10 year product limited warranty and a 25 year limited linear output warranty.



Positive Power Tolerance

## Positive Power Tolerance

LG provides rigorous quality testing to solar modules to assure customers of the stated power outputs of all modules, with a positive nominal tolerance starting at 0%.

# MonoX™ Black

LG265S1K-A3 / LG260S1K-A3 / LG255S1K-A3

## Mechanical Properties

Cells	6 x 10
Cell vendor	LG
Cell type	Monocrystalline
Cell dimensions	156 x 156 mm / 6 x 6 in
# of busbar	3
Dimensions (L x W x H)	1640 x 1000 x 35 mm 64.57 x 39.37 x 1.38 in
Static snow load	5400 Pa / 113 psf
Static wind load	2400 Pa / 50 psf
Weight	16.8 ± 0.5 kg / 36.96 ± 1.1 lb
Connector type	MC4 connector IP 67
Junction box	IP 67 with 3 bypass diodes
Length of cables	2 x 1000 mm / 2 x 39.37 in
Glass	High transmission tempered glass
Frame	Anodized aluminum

## Certifications and Warranty



Certifications	IEC 61215, IEC 61730-1/-2, IEC 61701, DLG-Fokus Test "Ammonia Resistance", UL 1703, ISO 9001
Product warranty	10 years
Output warranty of Pmax (measurement Tolerance ± 3%)	Linear warranty*

\* 1) 1st year: 97%, 2) After 2nd year: 0.7%p annual degradation, 3) 80.2% for 25 years

## Temperature Coefficients

NOCT	47.0 ± 2 °C
Pmpp	-0.44 %/°C
Voc	-0.31 %/°C
Isc	0.05 %/°C

## Characteristic Curves

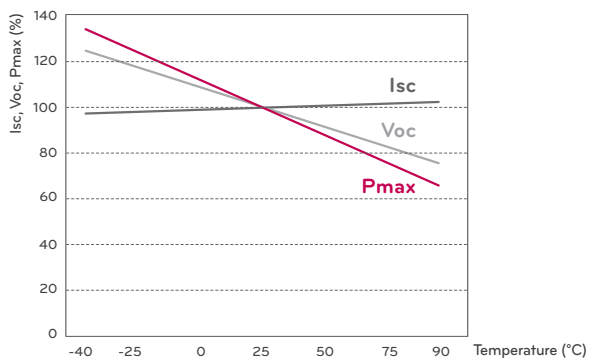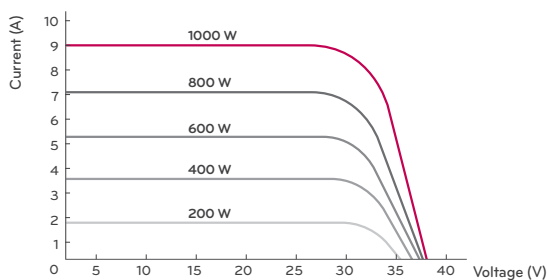

## Electrical Properties (STC\*)

	LG265S1K-A3	LG260S1K-A3	LG255S1K-A3
Maximum power at STC (Pmpp)	265	260	255
MPP voltage (Vmpp)	31.5	31.2	30.9
MPP current (Impp)	8.42	8.34	8.26
Open circuit voltage (Voc)	38.4	38.2	37.9
Short circuit current (Isc)	9.03	8.88	8.78
Module efficiency (%)	16.2	15.9	15.5
Operating temperature (°C)	-40 ~ +90		
Maximum system voltage (V)	1000 (IEC), 600 (UL)		
Maximum series fuse rating (A)	15		
Power tolerance (%)	0 ~ +3		

\* STC (Standard Test Condition): Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM 1.5


\* The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

## Electrical Properties (NOCT\*)

	LG265S1K-A3	LG260S1K-A3	LG255S1K-A3
Maximum power (Pmpp)	192	189	185
MPP voltage (Vmpp)	28.6	28.3	28.1
MPP current (Impp)	6.72	6.66	6.59
Open circuit voltage (Voc)	35.3	35.1	34.8
Short circuit current (Isc)	7.30	7.18	7.10
Efficiency reduction (from 1000 W/m <sup>2</sup> to 200 W/m <sup>2</sup> )	< 4.5 %		

\* NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, wind speed 1 m/s

## Dimensions (mm/in)

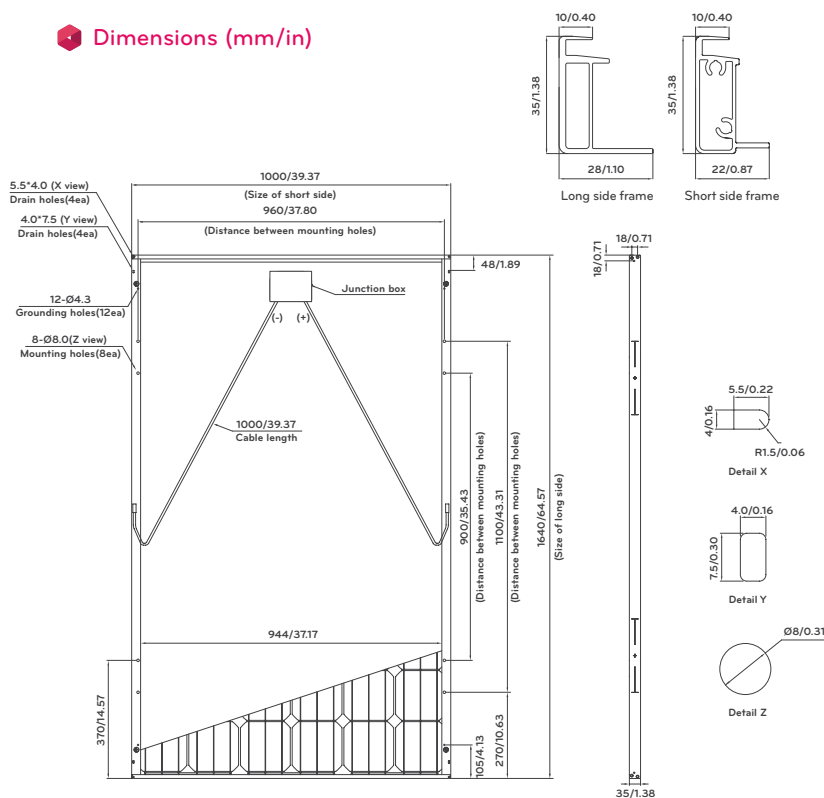

\* The distance between the center of the mounting/grounding holes

