

# REC TWINPEAK 25 72 PACKAGING INFORMATION


These packaging specifications are applicable to the following products:

REC TwinPeak 25 72 Series    REC TwinPeak 25 72 XV Series    REC TwinPeak 25 72 XV Bifacial Series

## PALLET FRONT VIEW (SINGLE STACK)



## PANEL IDENTIFICATION

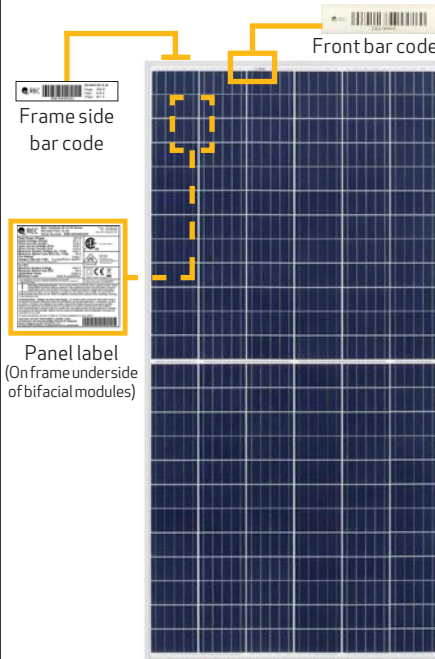

## PALLET SHIPMENT DIMENSIONS

Length of pallet:	2052 mm (81 in)
Width of pallet:	1055 mm (42 in)
Height of single pallet stack:	1120 mm (44 in)
Height of double pallet stack:	2240 mm (88 in)
Pallet weight:	53 kg (117 lbs)
Stack weight (pallet + panels):	ca. 730 kg (1609 lbs)

## DELIVERY INFORMATION

Panels per pallet:	30
Panels per GP/high cube container (40 ft):	660 (22 pallets)
Panels per 13.6 m truck:	780 (26 pallets)
Panels per 53 ft truck:	900 (30 pallets)


## DELIVERY DOCUMENTATION

Flash data list:	On short side
Serial number list:	On short side
Product name:	On long side
Watt class:	On long side

## PALLET SIDE VIEW (SINGLE STACK)



## PACKAGING DOCUMENTATION

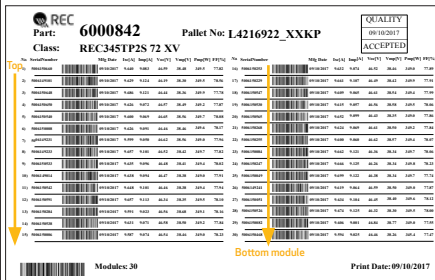

- Pallet No. 1 is the top module in a stack
- Pallet No. 30 is the lowest module in a stack
- Pallet documentation shows:
  - Module serial number
  - Module bar code
  - Manufacturing date
  - Electrical data ( $I_{SC}$ ,  $I_{MP}$ ,  $V_{OC}$ ,  $V_{MP}$ ,  $P_{MP}$ , Fill Factor)

## PACKAGING MATERIAL

Pallet:	Wood
Foam pad:	Polyurethane Polyether Polyol
Top cover:	Corrugated cardboard
Edge protectors:	Core board - Kraft
Corner pieces and spacers:	HDPE

**Note:** Pallet documentation envelope contains 2 x tools for simple connector release.

## STORAGE AND TRANSPORTATION

Stacking for storage:	2 pallets max
Stacking for transportation:	2 pallets max

**Note:** When double stacking pallets, ensure upper pallet sits securely on edge protector.

**Note:** Pallets delivered stacked are not bound together.

## PALLET STACKING



## QUALITY

REC performs a quality check on all pallets before and during loading. Vehicles will only be loaded with REC panels if they are deemed safe and serviceable. During transportation, the pallets are stably loaded in protected containers with air bags between pallets to secure them in position. The freight company and driver are responsible for ensuring suitable load safety for each delivery vehicle. Vehicles without suitable load safety measures will not be loaded. REC makes every effort to ensure environmentally-friendly packaging materials are used.

## MINIMUM FORK LENGTHS FOR TRANSPORTATION

		Single/Double stack only
Forklift	Long side	1.2 m (47 in) Loading & unloading of container only
	Short side	1.8 m (71 in)
Pallet jack	Long side	X
	Short side	1.8 m (71 in)

**Note:** Forks must be spaced a minimum of 500 mm apart. Handlers must ensure that vehicles used for REC pallets can handle the specified load safely.

**Note:** Specifications subject to change without notice